


INSULATED PIPE SUPPORTS
SNAPPITZ

PVC – Urethane self locking pipe support system



			CLAMP SIZE					Insulation & Jacketing Length		
Copper Pipe Size	Iron Pipe Size	Iron Pipe Outside Diameter		1/2"	1"	1 1/2"	2"	2 1/2"	4"	6"
3/4	1/2"	.840	Insulation OD	1.900	2.875	4.000	5.000	-	4	-
1	3/4"	1.050		2.375	2.875	4.000	5.000	-	4	-
1 1/4	1"	1.315		2.375	3.500	4.500	5.563	-	4	-
1 1/2	1 1/4"	1.660		2.875	3.500	5.000	5.563	-	4	-
2	1 1/2"	1.900		2.875	4.000	5.000	6.625	-	4	-
2 1/2	2"	2.375		3.500	4.500	5.563	6.625	7.625	4	-
3	2 1/2"	2.875		4.000	5.000	6.625	7.625	8.625		6
	3"	3.500		4.500	5.563	6.625	7.625	8.625		6
	3 1/2"	4.000		5.000	6.625	7.625	8.625	9.625		6
4	4"	4.500		5.563	6.625	7.625	8.625	9.625		6
	4 1/2"	5.000		6.625	7.625	8.625	9.625	10.750		6
	5"	5.563		6.625	7.625	8.625	9.625	10.750		6

Up to 2 1/2" pipe, Trymer has adequate compressive strength to meet the requirements of weight bearing loads at the hanger point. Insul-phen is used to accommodate the compression for the larger diameter piping system.

PVC pipe has the following smoke & flame characteristics when tested in accordance with ASTM E84-05:

Flame spread classification: 5 Smoke developed classification: 30


Standard size is 4" of insulation and jacketing for pipes 1/2" – 2".
 6" jacketing & insulation is used for pipes 2 1/2" – 6".

Trymer 2000 - Urethane has the following characteristics:


- Compressive Strength = 24 p.s.i. average
- Flexural Strength = 44 p.s.i. average
- K Factor = .190 @ 75 degree F - aged 180 days
- Working Temperature Range = -297 degree F to +300 degree F
- Trymer 2000 insulation is used for 1/2 inch wall thickness insulation inserts

Insul-Phen - Phenolic Foam has the following characteristics:

- Compressive Strength = 3.75 54 p.s.i. average
- K Factor = .16 @ 250 degree F—aged 7 days
- Working Temperature Range = -290° F to =250°F

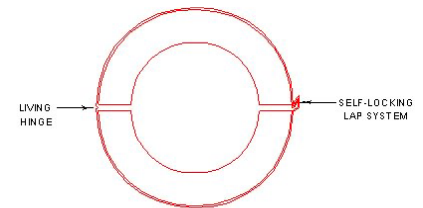

CLOSED POSITION



OPEN POSITION